## **GUJARAT TECHNOLOGICAL UNIVERSITY** M. E. - SEMESTER – I • EXAMINATION – WINTER 2012

## Subject code: 712903N Subject Name: Digital Signal Controller Time: 02.30 pm – 05.00 pm

Total Marks: 70


Date: 12/01/2013

## Instructions:

- 1. Attempt all questions.
- 2. Make suitable assumptions wherever necessary.
- 3. Figures to the right indicate full marks.
- Q.1 (a)

06


State the sampling theorem. Given  $x(t) \xrightarrow{FT} X(w)$ , for the spectrum of the continuous-time signal, shown in Fig.1, consider the three cases  $f_s = 2f_x$ ;  $f_s > 2f_x$  and  $f_s < 2f_x$ ; draw the spectra, indicating aliasing for all three cases.



(**b**) Do as directed :

**08** 

- (i) Draw low-pass filter magnitude characteristics with all necessary tolerance limits.
- (ii) Define IDFT. State its two applications.
- (iii) Discuss significance of Nyquist rate for sampling.
- (iv) For the signal shown in the fig.2 .Evaluate the integral  $\int_{0}^{\pi} |\mathbf{x}(\mathbf{e}^{j\omega})|^2 d\omega$ .

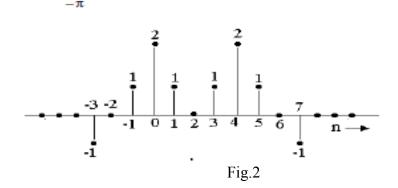

- Q.2 (a) Describe any one type of DSP architecture.
  (b) Describe the Kaiser window filter design procedure for a high pass filter.
  OR
  (b) Enlist various window sequences for FIR filter design. Explain any one of 07 them in detail.
- **Q.3 (a)** For the two four-point sequences  $x(n) = \cos(n\pi/2)$  and  $y(n) = \sin(n\pi/2)$ . **06** Obtain linear convolution of x(n) with y(n) directly.
  - (b) Consider a causal system whose input and output satisfy the difference 06 equation y(n)- a y(n-1) = x(n).

1

		(i) Find $H(z)$ , ROC and condition(s) for stability.	
		(ii) Plot detailed pole-zero diagram.	
		(iii) Given system is IIR or FIR? Why?	
	(c)	State and prove differentiation property of Fourier Transform.	02
• •		OR (A LT CARACTER CAR	0.6
Q.3	<b>(a)</b>	An LTI system is characterized by $y(n) - ay(n-1) = x(n)$ ; determine its	06
	( <b>b</b> )	frequency and impulse response using DTFT. Find inverse Z –transform of	06
	(0)	1	vu
		(i) X (z) = $ z  > (1/2).$ (1-0.25z <sup>-1</sup> ) (1-0.5 z <sup>-1</sup> )	
		(1-0.25Z)(1-0.5Z)	
		(ii) $X(z) = \log(1 + a z^{-1})  z  >  a .$	
	(c)	State conditions of convergence for Fourier transform.	02
0.4			
Q.4	<b>(a)</b>	Consider a LTI system with system function as follows: $Z(s) = (1+2z^{-1} + z^{-2}) / (1 - 0.75 z^{-1} + 0.125 z^{-2}).$ Obtain	07
		(i) Direct form $-I$ and (ii) Direct form $-II$ structure. Comments on the	
		result obtained.	
	<b>(b)</b>	Obtain impulse response of a digital filter to correspond to an analog filter	07
		with impulse response $h(t) = 0.5 e^{-2t}$ and with a sampling rate of 0.1kHz	
		using impulse invariant method only.	
0.4		OR	
Q.4	(a)	With help of signal flow graph, discuss structure of Linear phase FIR system.	07
Q.4	( <b>b</b> )	For linear phase FIR filters, how constant group and phase delay is	07
2	(0)	achieved? Also, enlist various design techniques for linear phase FIR filter.	07
Q.5	<b>(a)</b>	State and prove the following properties of DFT:	08
		(i) linearity (ii) duality (iii) periodicity (iv) circular convolution	0.6
	<b>(b</b> )	Consider a stable causal LTI system whose input $x(n)$ and output $y(n)$ are related through difference equation	06
		related through difference equation , y(n) - (3/4) y(n-1) + (1/8) y(n-2) = 2x(n).	
		Determine the response if $x(n) = \binom{1}{4}^n u(n)$ .	
		OR	
Q.5	<b>(a)</b>	(i) Find the IDFT of $Y(k) = \{1,0,1,0\}$ .	08
		(ii) Find the 4- point DFT of the sequence $x(n) = \{1,1,0,0\}$ .	
	<b>(b</b> )	(i) Compare FIR filter with IIR filter in tabular form.	06
		(ii) What are the possible types of impulse response for linear phase FIR filters?	
		111015:	

\*\*\*\*\*