## GUJARAT TECHNOLOGICAL UNIVERSITY M. E. - SEMESTER – I • EXAMINATION – WINTER • 2013

Subject code: 714702N Subject Name: Advance Control Systems Time: 10.30 am – 01.00 pm Instructions:

Date: 26-12-2013

07

## **Total Marks: 70**

- 1. Attempt all questions.
  - 2. Make suitable assumptions wherever necessary.
  - 3. Figures to the right indicate full marks.

**Q.1** (a) Do as directed.

- (1) Why compensation is necessary in feedback control system?
- (2) State advantages of state-space method over the conventional transfer function method.
- (3) Discuss the advantages and disadvantages of sampled data control systems.
- (b) What is the relation between s and z domain? Discuss the stability **07** criterion for each of them.
- Q.2 (a) Draw the frequency domain characteristic of phase-lag network used 07 for control system compensations. Discuss the importance when lag compensation is employed.
  - (b) Design suitable lag compensator for a system with unity feedback and 07 having open-loop transfer function

$$G(s) = \frac{K}{s(1+2s)}$$

to meet the following specifications:

- (i) Phase Margin is  $40^{\circ}$ .
- (ii) the steady state error for ramp input is less than or equal to 0.2.

## OR

(b) Design a lead compensator for a unity feedback control system with 07 open-loop transfer function is given by

$$G(s) = \frac{K}{s(s+4)(s+7)}$$

to meet the following specifications:

- (i) Percentage peak overshoot = 12.63%
- (ii) Natural frequency of oscillation  $(w_n) = 8$  rad/sec
- (iii) Velocity error constant ( $K_v \ge 2.5$
- Q.3 (a) Derive the describing function of the element whose input output 07 characteristic is shown in Figure 1.
  - (b) For the system shown in Figure 2 having a saturating amplifier with gain K. Determine the maximum value of K for the system to stay stable.

- Q.3 (a) Derive the describing function of the element whose input output 07 characteristic is shown in Figure 3.
  - (b) Using Delta method construct a phase trajectory for a nonlinear system
     07 represented by the differential equation,

 $\ddot{x} + 4|\dot{x}|\dot{x} + 4x = 0$  with initial condition  $\begin{array}{c} x(0) = 1\\ \dot{x}(0) = 0 \end{array}$ 

- **Q.4** (a) Determine z-transform of the function  $f(t) = \sin \omega t$ . 07
  - (b) Determine the unit step time response for the pulse transfer function 07

$$\frac{C(z)}{R(z)} = \frac{z}{z^2 - z + 0.5}$$
OR

(b) Find out inverse z – transform, using partial expansion method 07

$$F(z) = \frac{z^2}{z^2 - 1.5z + 0.5}$$

**Q.5** (a) For the given differential equation

$$\frac{d^{3}y}{dt^{3}} + 6\frac{d^{2}y}{dt^{2}} + 11\frac{dy}{dt} + 6y = u(t)$$

- (a) Represent in state variable form.
- (b) Find out state transition matrix.

$$\dot{x}(t) = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -1 & -2 & -4 \end{bmatrix} x(t) + \begin{bmatrix} 0 \\ 0 \\ 10 \end{bmatrix} u(t) ; \qquad y(t) = \begin{bmatrix} 1 & 0 & 0 \end{bmatrix} x(t)$$

Find the transfer function of the system.

Q.5 (a) Obtain the state model for a system whose transfer function is given as, 07

$$\frac{C(s)}{R(s)} = \frac{10(s+4)}{s(s+1)(s+3)}$$

(b) A linear-time-invariant system is characterized by the homogeneous 07 state equation


$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ 1 & 1 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix}; \text{ Assume the initial state vector } \begin{bmatrix} x_1(0) \\ x_2(0) \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \end{bmatrix}$$

Compute the solution of homogeneous state equation.

2/3

07

07

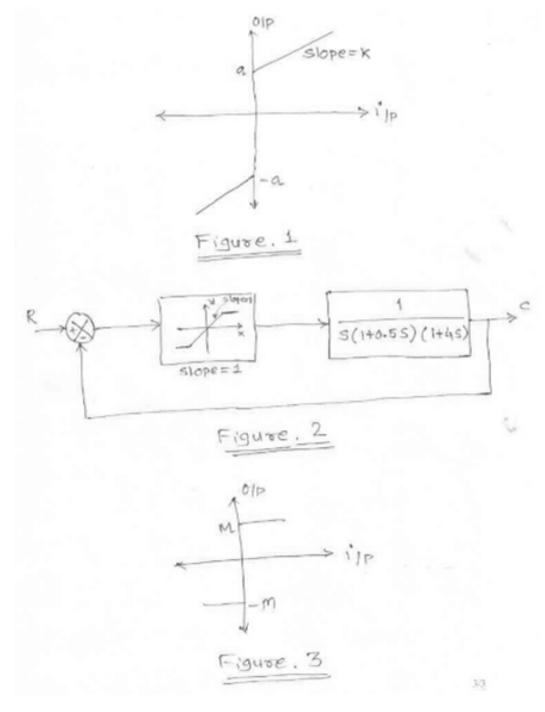

\*\*\*\*\*