GUJARAT TECHNOLOGICAL UNIVERSITY BE - SEMESTER-VI • EXAMINATION - SUMMER • 2014


Subject Code: 160202 **Subject Name: Automobile Heat Transfer** Time: 10:30 am - 01:00 pm

Date: 21-05-2014

Total Marks: 70

Instructions:

- 1. Attempt all questions.
- 2. Make suitable assumptions wherever necessary.
- 3. Figures to the right indicate full marks.
- Show by dimensional analysis for the free convection, $Nu = \hat{Q}(Gr, Pr)$. 07 Q.1 (a) 07
 - Derive the expression for LMTD for parallel flow heat exchangers. **(b)**
- Find the heat flow rate through a composite wall as shown in the figure 1. Assume one-07 **O.2** (a) dimensional flow. $K_A = 150 \text{ W/m}^0\text{C}$; $K_B = 30 \text{ W/m}^0\text{C}$; $K_{C} = 65 W/m^{0}C$: $K_{\rm D} = 50 {\rm W/m}^{0} {\rm C}.$

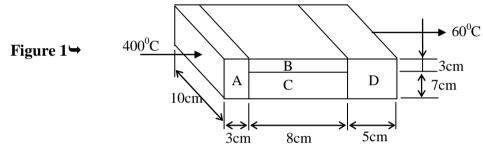

(b) Derive the most general heat conduction equation in Cartesian coordinate system. 07 OR

(b) What is lumped system analysis? What are the assumptions made in the lumped system 07 analysis and when is it applicable? Prove that the temperature distribution in a body at time t during a Newtonian heating or cooling is given by,

$$\frac{T-T_{\infty}}{T_i-T_{\infty}}=e^{-BiFo}$$

- What is the function of radiator in an automobile? Explain with a neat sketch 07 **Q.3 (a)** construction of a radiator. Which are the main parameters that affect the performance of a radiator?
 - (b) A steel ball 50mm in diameter and at 900°C is placed in still atmosphere of 30° C. 07 Calculate the initial rate of cooling of the ball in ⁰C/min. Neglect internal thermal resistance. Take;

 ρ =7800 Kg/m³, C=2kJ/kg⁰C (for steel), h=30W/m²⁰C.

OR

- Discuss the modes of condensation. Why dropwise condensation is preferred? What are Q.3 (a) 07 the practical difficulties in retaining dropwise condensation on a surface?
 - The temperatures on the two surfaces, of a 25mm thick steel plate ($k=48 \text{ W/m}^{\circ}\text{C}$) 07 **(b)** having a uniform volumetric heat generation of 30*10⁶ W/m³, are 180^oC & 120^oC. Neglecting the end effects, determine the value and position of the maximum temperature and temperature distribution across the plate.
- What do you mean by critical thickness of insulation? Explain its physical significance 07 **O.4** (a) and derive the equation for the same for cylindrical shaped body.

(b) An electricity carrying wire of 0.00325m radius at a temperature of 60° C is to be **07** insulated by a material having k=0.174W/m^oC and convection heat transfer coefficient (h₀) = 8.722W/m²^oC. The ambient temperature is 20^oC. For maximum heat loss, what is the minimum thickness of insulation and heat loss per meter length? Also find percentage increases in heat dissipation too.

OR

- Q.4 (a) Derive an expression for the temperature distribution and heat dissipation from an 07 infinite long fin.
 - (b) Assuming that a man can be represented by a cylinder 350mm in diameter and 1.65m 07 high with a surface temperature of 28°C. Calculate the heat he would lose while standing in a 30km/hour wind at 12°C. The properties of air at 20°C are: v=15*10⁻⁶ m²/sec, K=2.59*10⁻²W/m-K, Pr=0.707. Take Nu_{avg}=0.027(Re)^{0.805} (Pr)^{1/3}
- Q.5 (a) Write short notes on the following: (a) Absoptivity, (b) grey body, (c) Intensity of radiation and, (d) black body. 07
 - (b) Explain the circumstances under which natural convection occurs. Differentiate 07 between natural and forced convection.

OR

- Q.5 (a) What is a radiation shield? When it is used? Also write the expression for radiation heat 07 transfer between two parallel plates with one shield.
 - (b) Write a short note on heat pipe stating principle of operation, types and applications. 07
